



ELEVATIONS — EAVES +8.00m • RIDGE +12.00m • 38° GABLE

Block 1.2m + metal cladding to eaves • Skylights + ridge vents • West: 3 entrances (E1/E2/E3) • East: print entry (E4) + fire stair

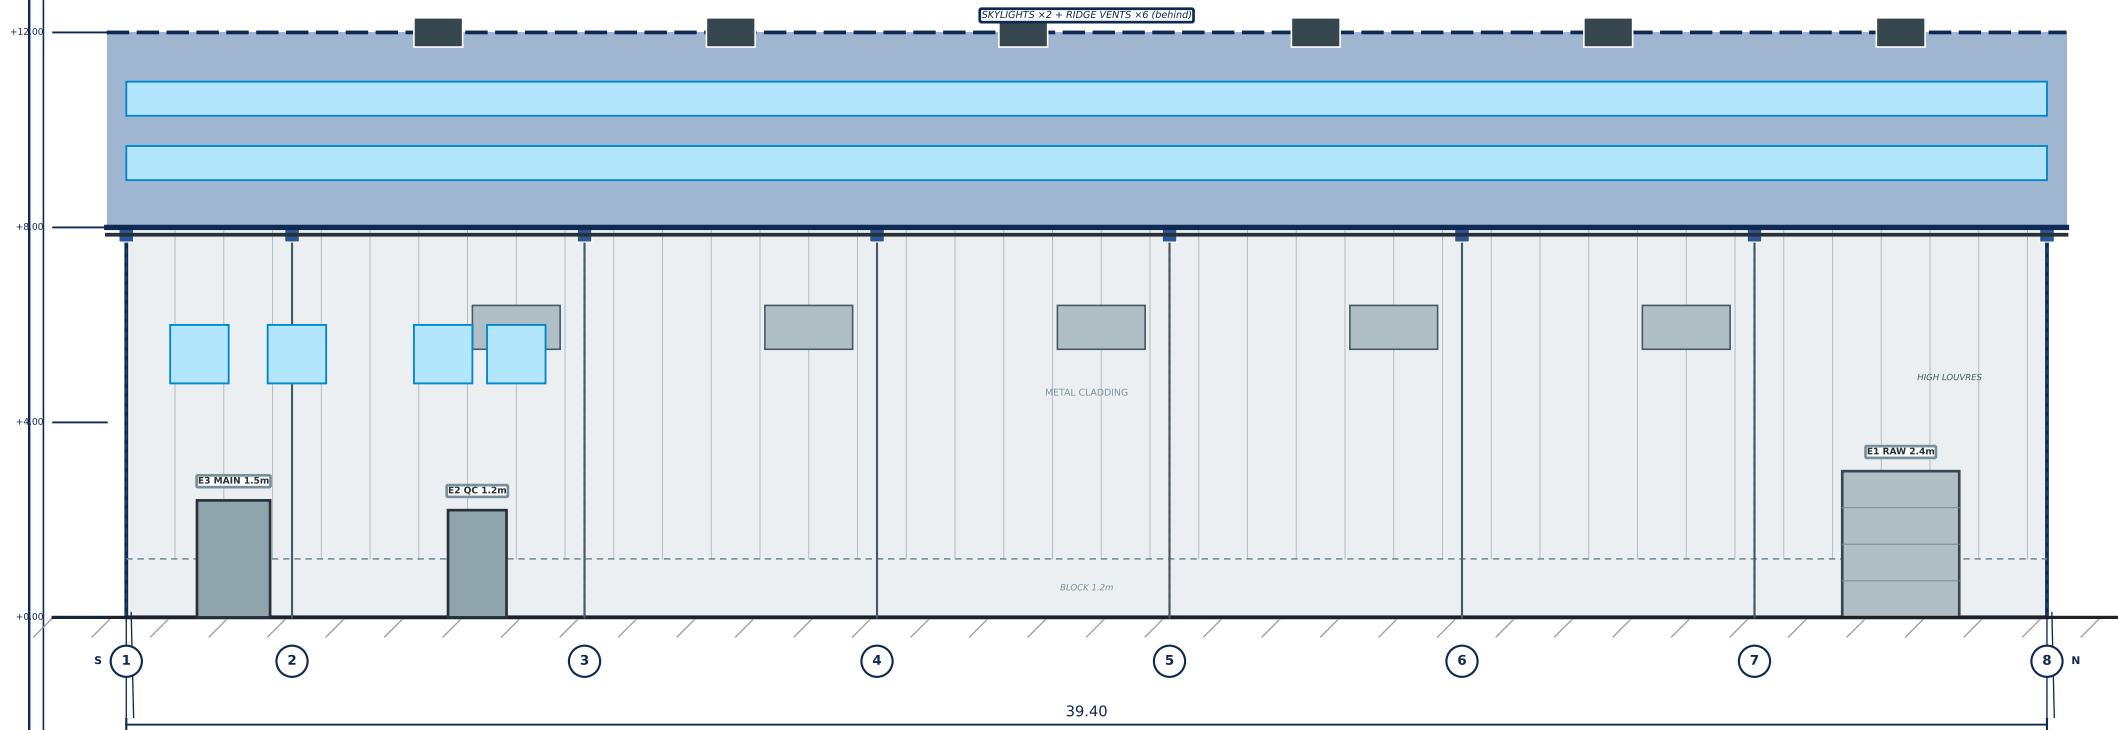


LEFT / WEST ELEVATION (from driveway — 4.0m setback)

S (left) → N (right) • E3 Main + E2 QC + E1 Raw roller • Grid 1-8 @6.0m

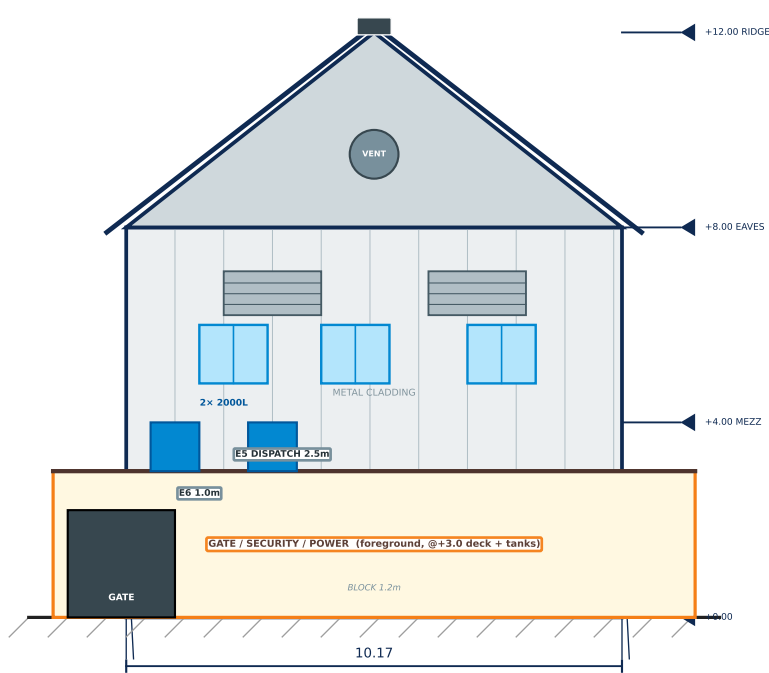


FRONT / SOUTH

from Main Road (gate in foreground)

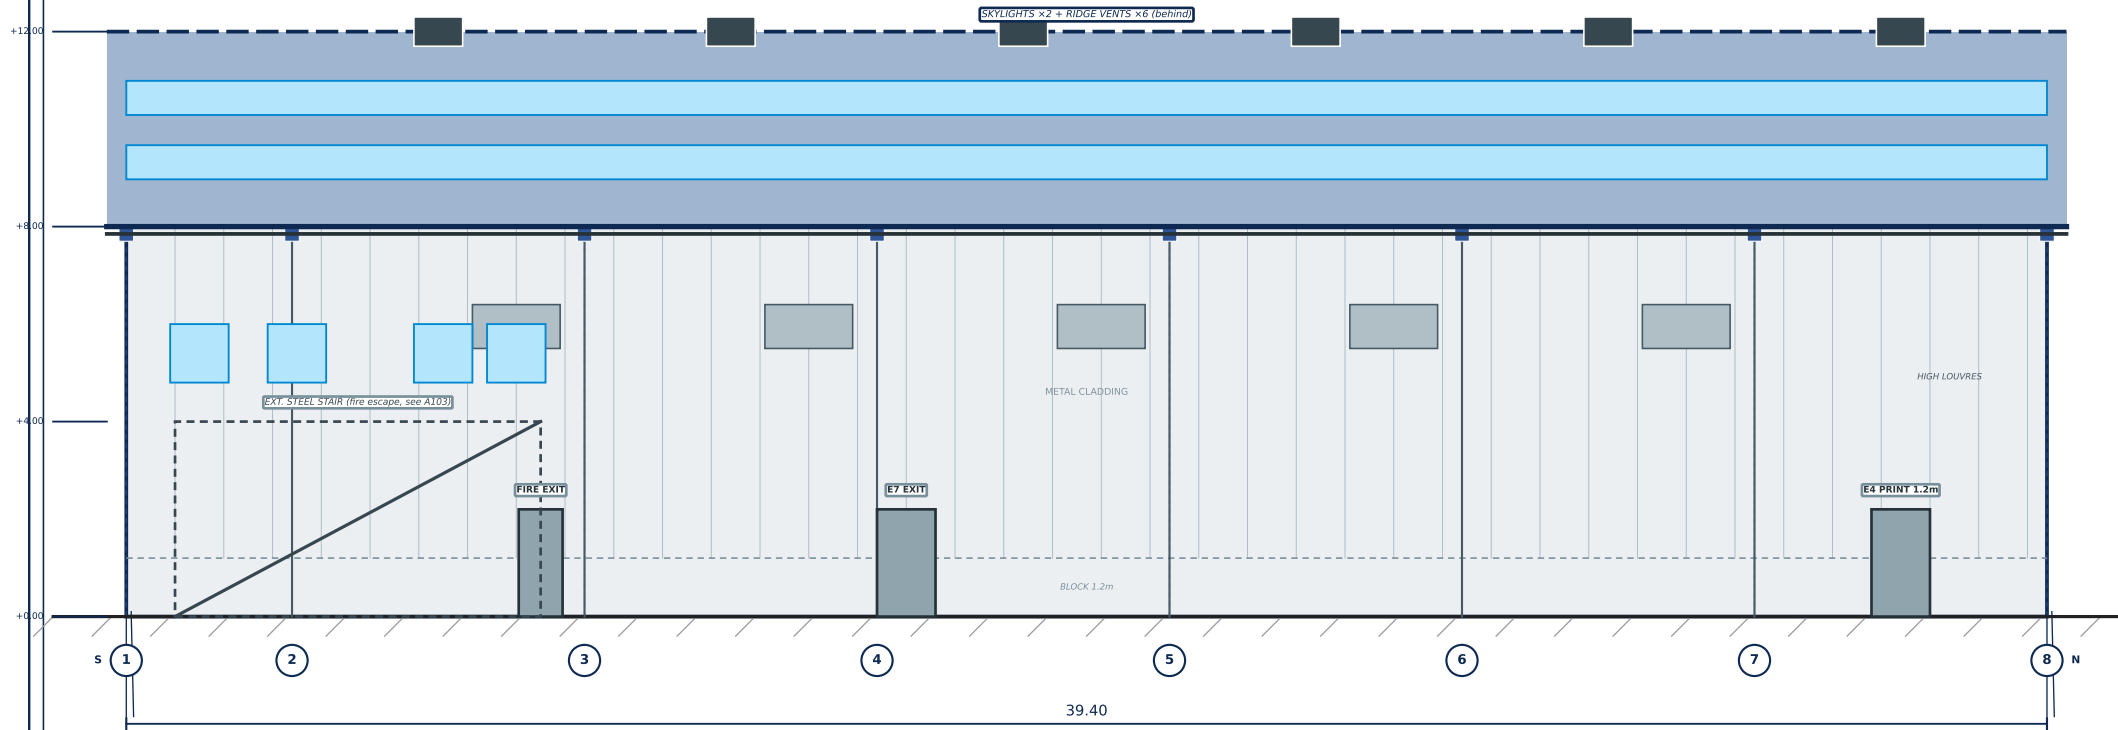

RIGHT / EAST ELEVATION (from 2.0m setback)

S (left) → N (right) • E4 Print-only + E7 Exit + fire-escape stair

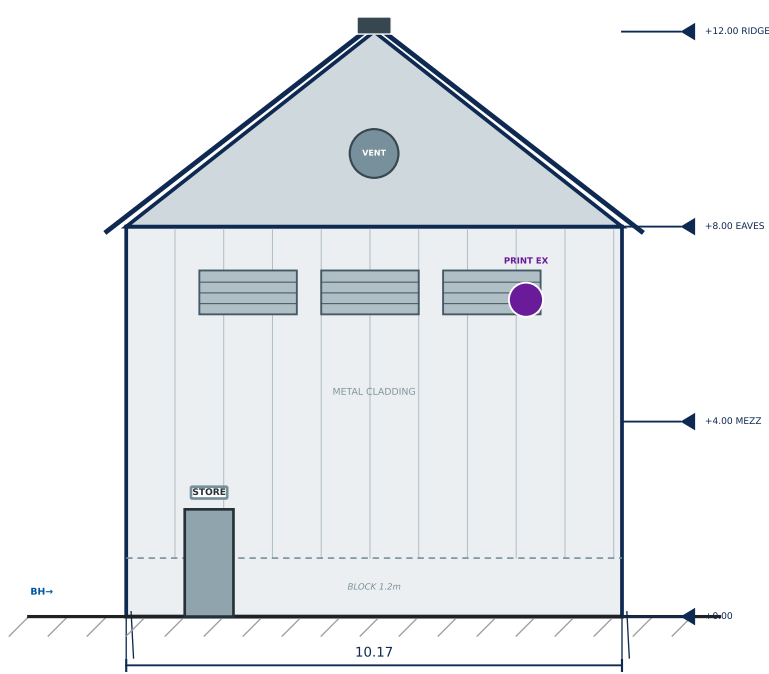

REAR / NORTH

from rear setback (borehole W)

FINISHES & LEVELS

• Walls: 150/215 block to 1.2m + insulated box-profile cladding to +8.0m. • Roof: 0.55 Al-Zn sheets @38° + skylights + vents.

• Doors: steel personnel + roller shutters (see key E1-E7). • Windows: alum. sliding (offices) + louvres (hall, high).

• Levels: +0.00 FFL (power-float) • +3.00 gate deck • +4.00 mezz • +8.00 eaves • +12.00 ridge. • Colours: blues/greys (TBC).

NYLON PRODUCTION & PACKAGING PLANT

Along Ilogbo / Foundation Road, Oko-Afo, Badagry LGA, Lagos State

A201 | ELEVATIONS • FRONT / REAR / SIDES

1:100 | 27-09-2026

PRELIMINARY - FOR DISCUSSION