
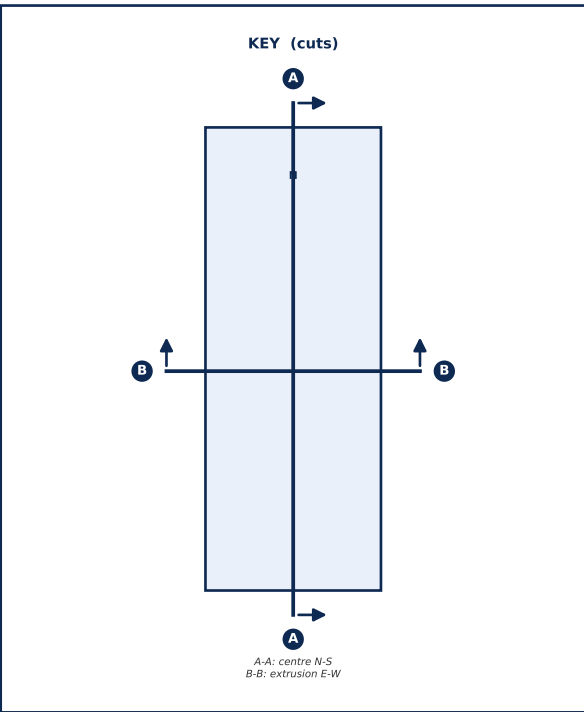



SECTIONS — A-A LONGITUDINAL (39.40m) • B-B CROSS (10.17m span)

Portal steel @6.0m • Mezz +4.0 south • Extrusion masts ≈9m (check clearance) • Ridge vents + skylights + print extract

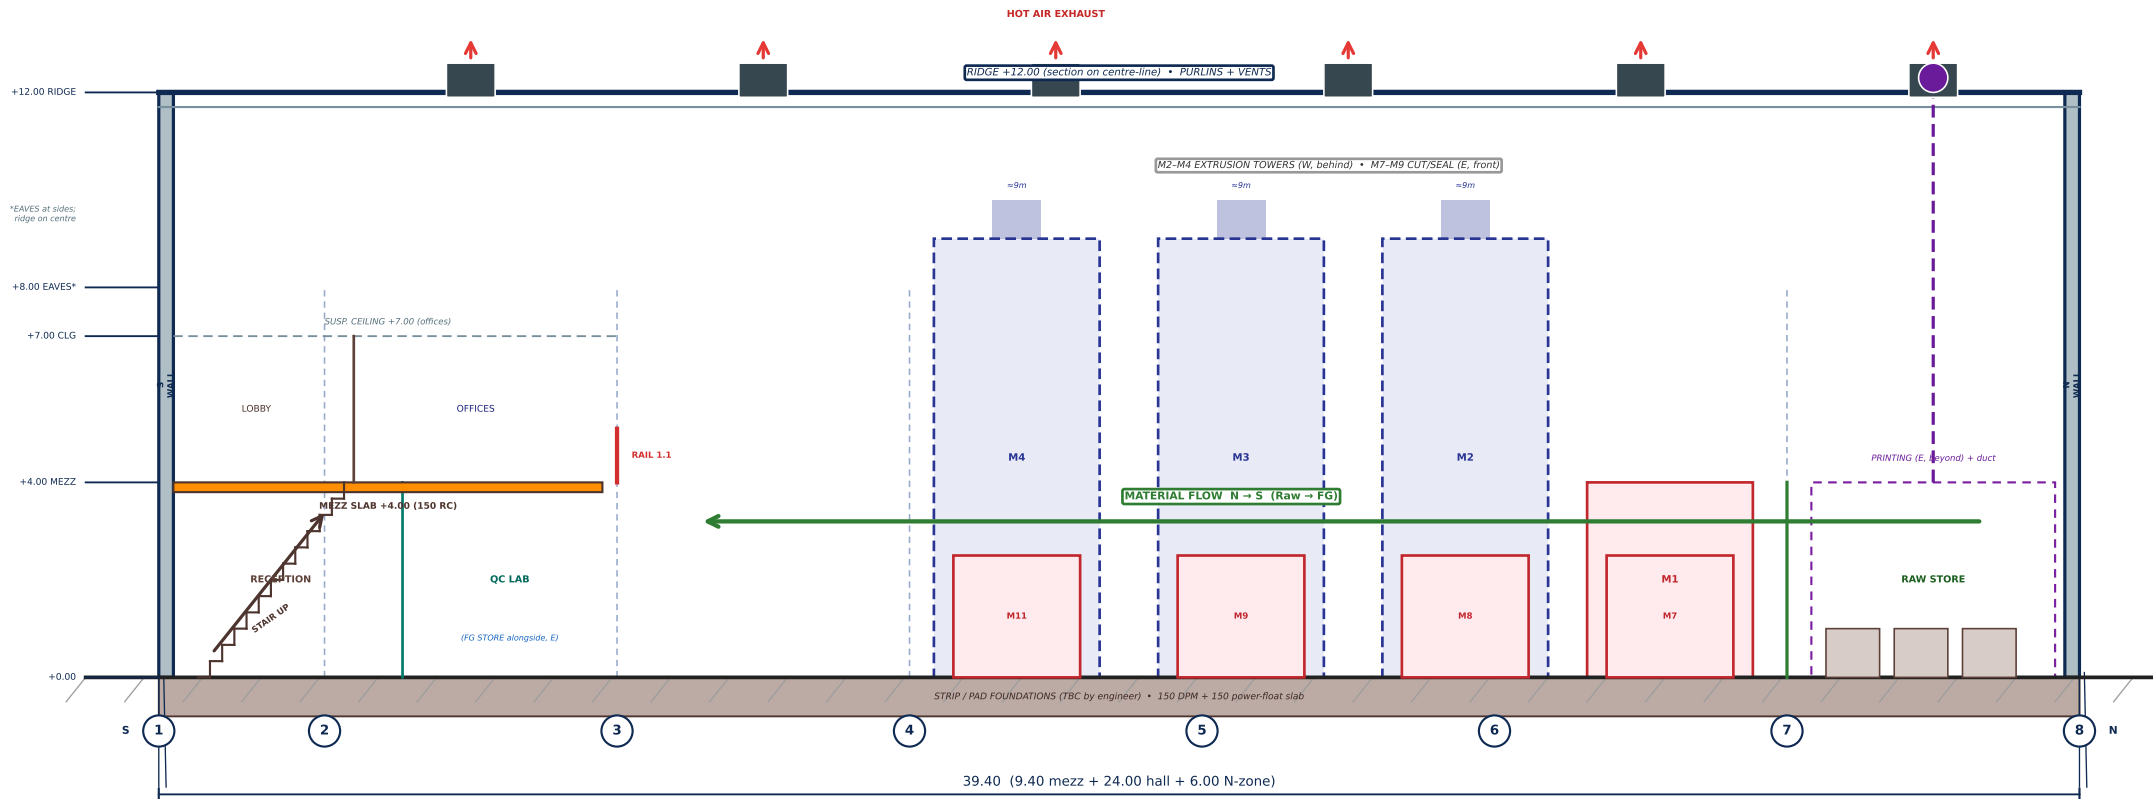

SECTION A—A • LONGITUDINAL (N-S through centre, looking EAST)

S (left) → N (right) • Mezz south + extrusion towers + raw/print north • Ridge +12.0 constant on centre-line

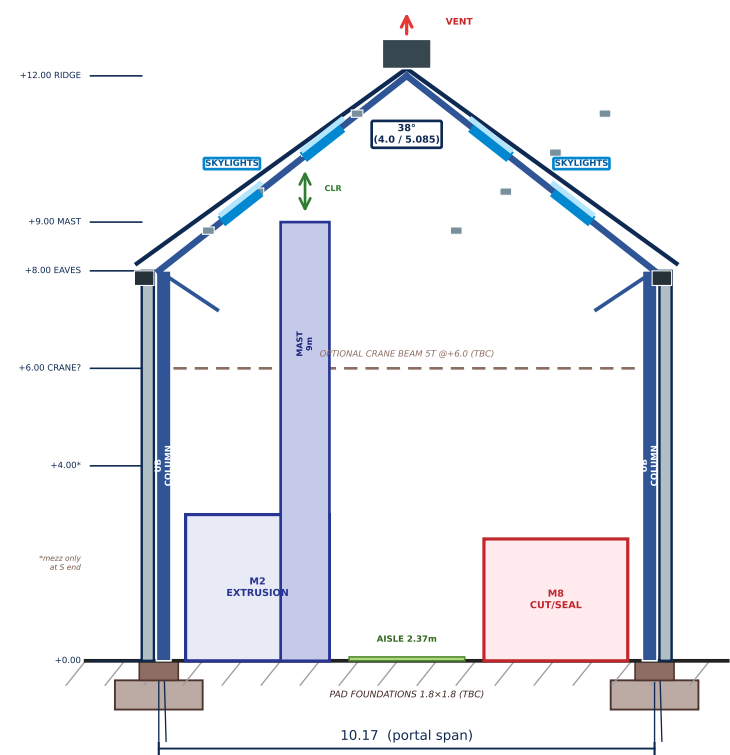


STRUCTURE & BUILD NOTES

- Portal frames: UB columns + rafters @6.0m (7 frames).
- Eaves +8.0, ridge +12.0 (38°). Purlins RHS + sag rods.
- Walls: block 1.2m + cladding; printing room 215 block full ht.
- Floor: 150 slab + DPM + power-float; saw cuts @3m.
- Mezz: 150 RC on UB/APFC + 1.1 rail; pad/strip footings.
- Extrusion masts 9m; keep tall side to ridge (see B-B).
- Crane beam ST optional @+6.0 (confirm with vendor).
- Fire: extinguishers + hose reels + exit signs; print room 2hr.
- Elect: 3-ph to machines + panels on mezz; earthing + LPS.
- Drain: gutters→RWP→soakaway; WCs→septic (E); bund chemicals.
- Verify ALL with structural/M&E engineers + Lagos approvals.

SECTION B—B • CROSS (E-W through extrusion, looking NORTH)

W (left) → E (right) • Portal frame + extrusion mast (W) + cut/seal (E) • Note mast clearance under slope

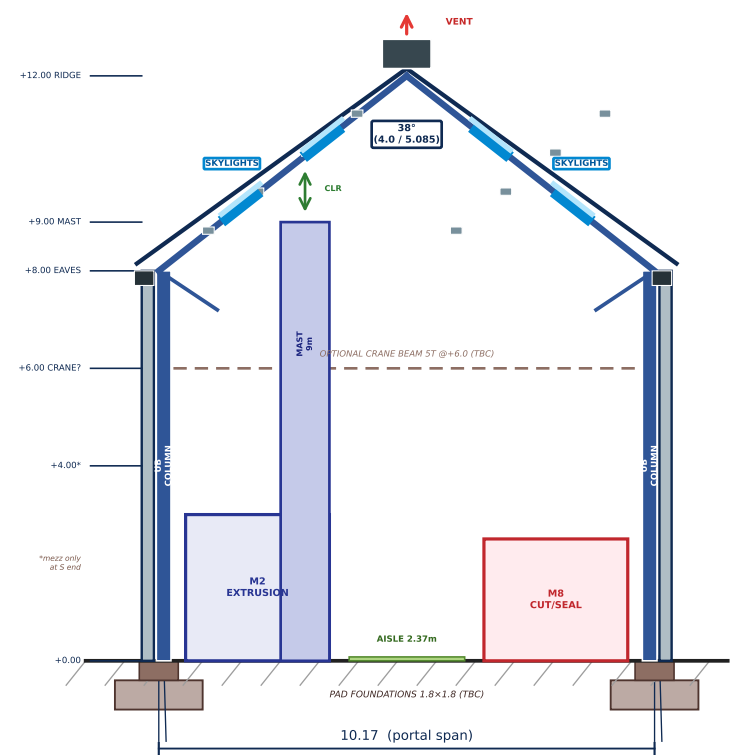

NYLON PRODUCTION & PACKAGING PLANT

Along Ilogbo / Foundation Road, Oko-Afo, Badagry LGA, Lagos State