


SITE PLAN — 806.896 m² (LAA/195/29/2025/LA)

Production hall 10.17 × 39.40m • Gate/Security/Power block decked • Steel portal @6.0m • Eaves +8.0m / Ridge +12.0m

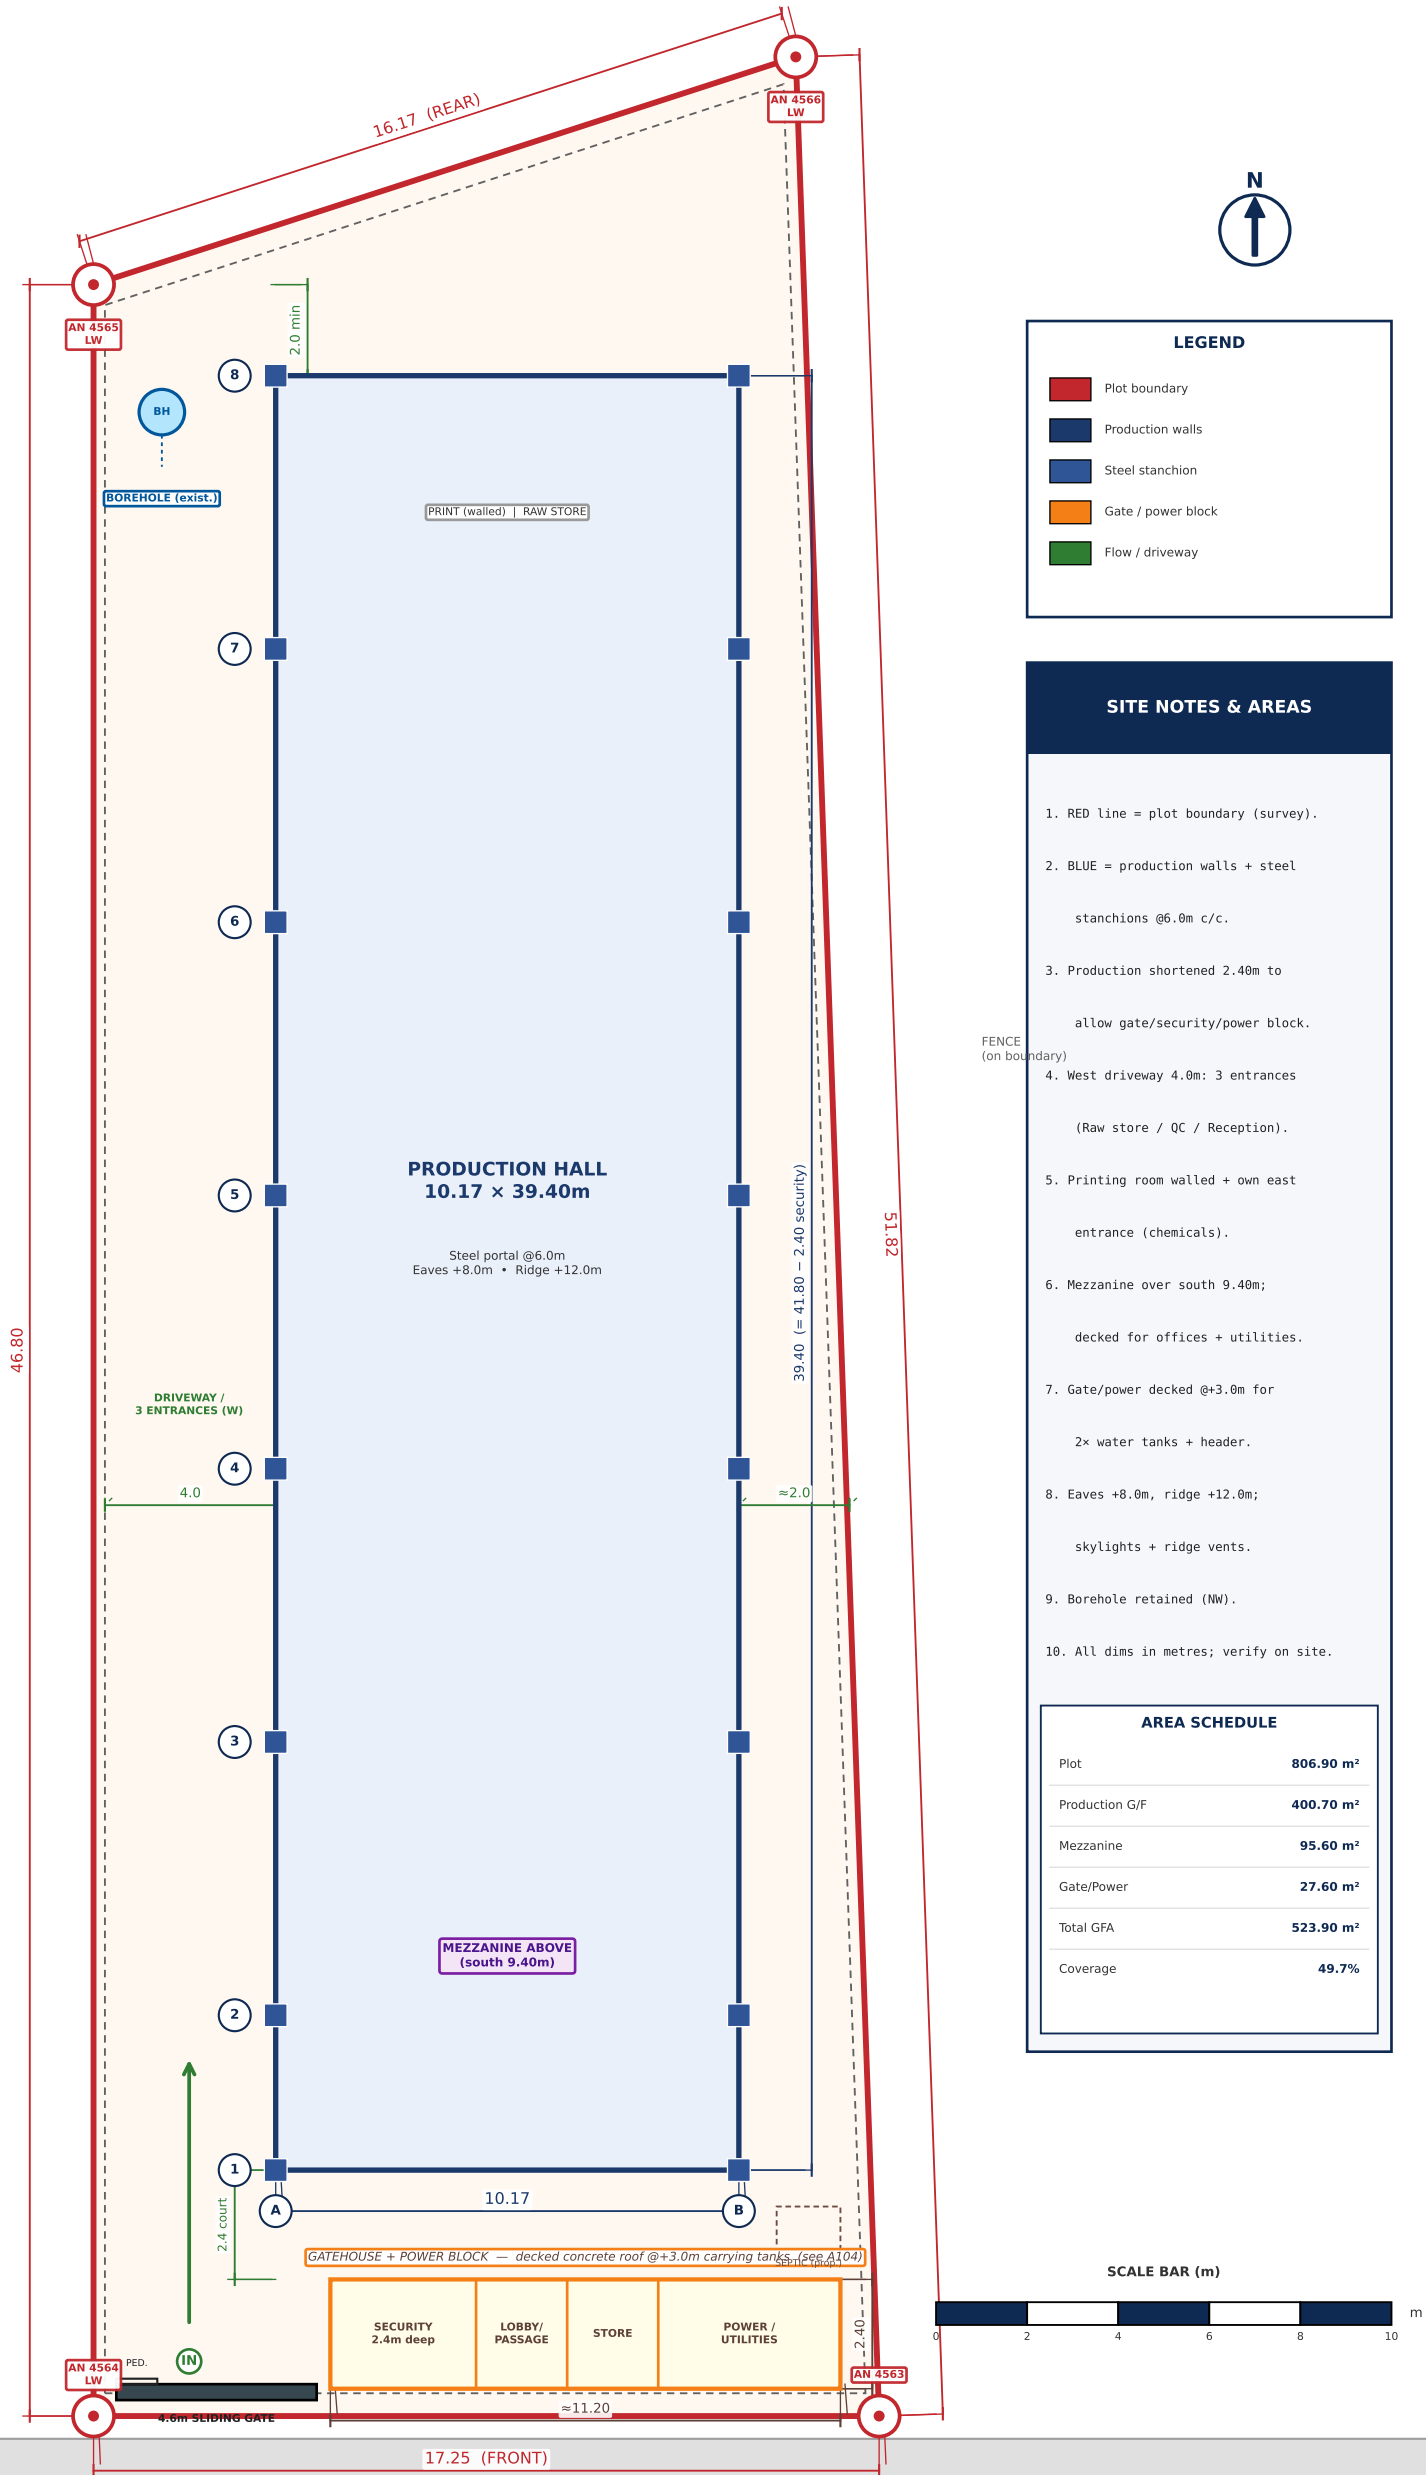

Main Gate → 4.6m sliding gate + pedestrian gate

ILOGBO / FOUNDATION ROAD (MAIN ROAD)

NYLON PRODUCTION & PACKAGING PLANT

Along Ilogbo / Foundation Road, Oko-Afo, Badagry LGA, Lagos State


A101 | SITE & LOCATION PLAN • GATEHOUSE • SETBACKS

1:200 (SITE) | 27-09-2026

PRELIMINARY - FOR DISCUSSION


GROUND FLOOR PLAN — PRODUCTION HALL 10.17 × 39.40m (400.7 m²)

3 entrances on WEST wall • Printing room walled + own EAST entrance • Steel stanchions @6.0m • Flow: Raw → Mix → Extrude → Print → Cut/Seal → QC → FG → Dispatch

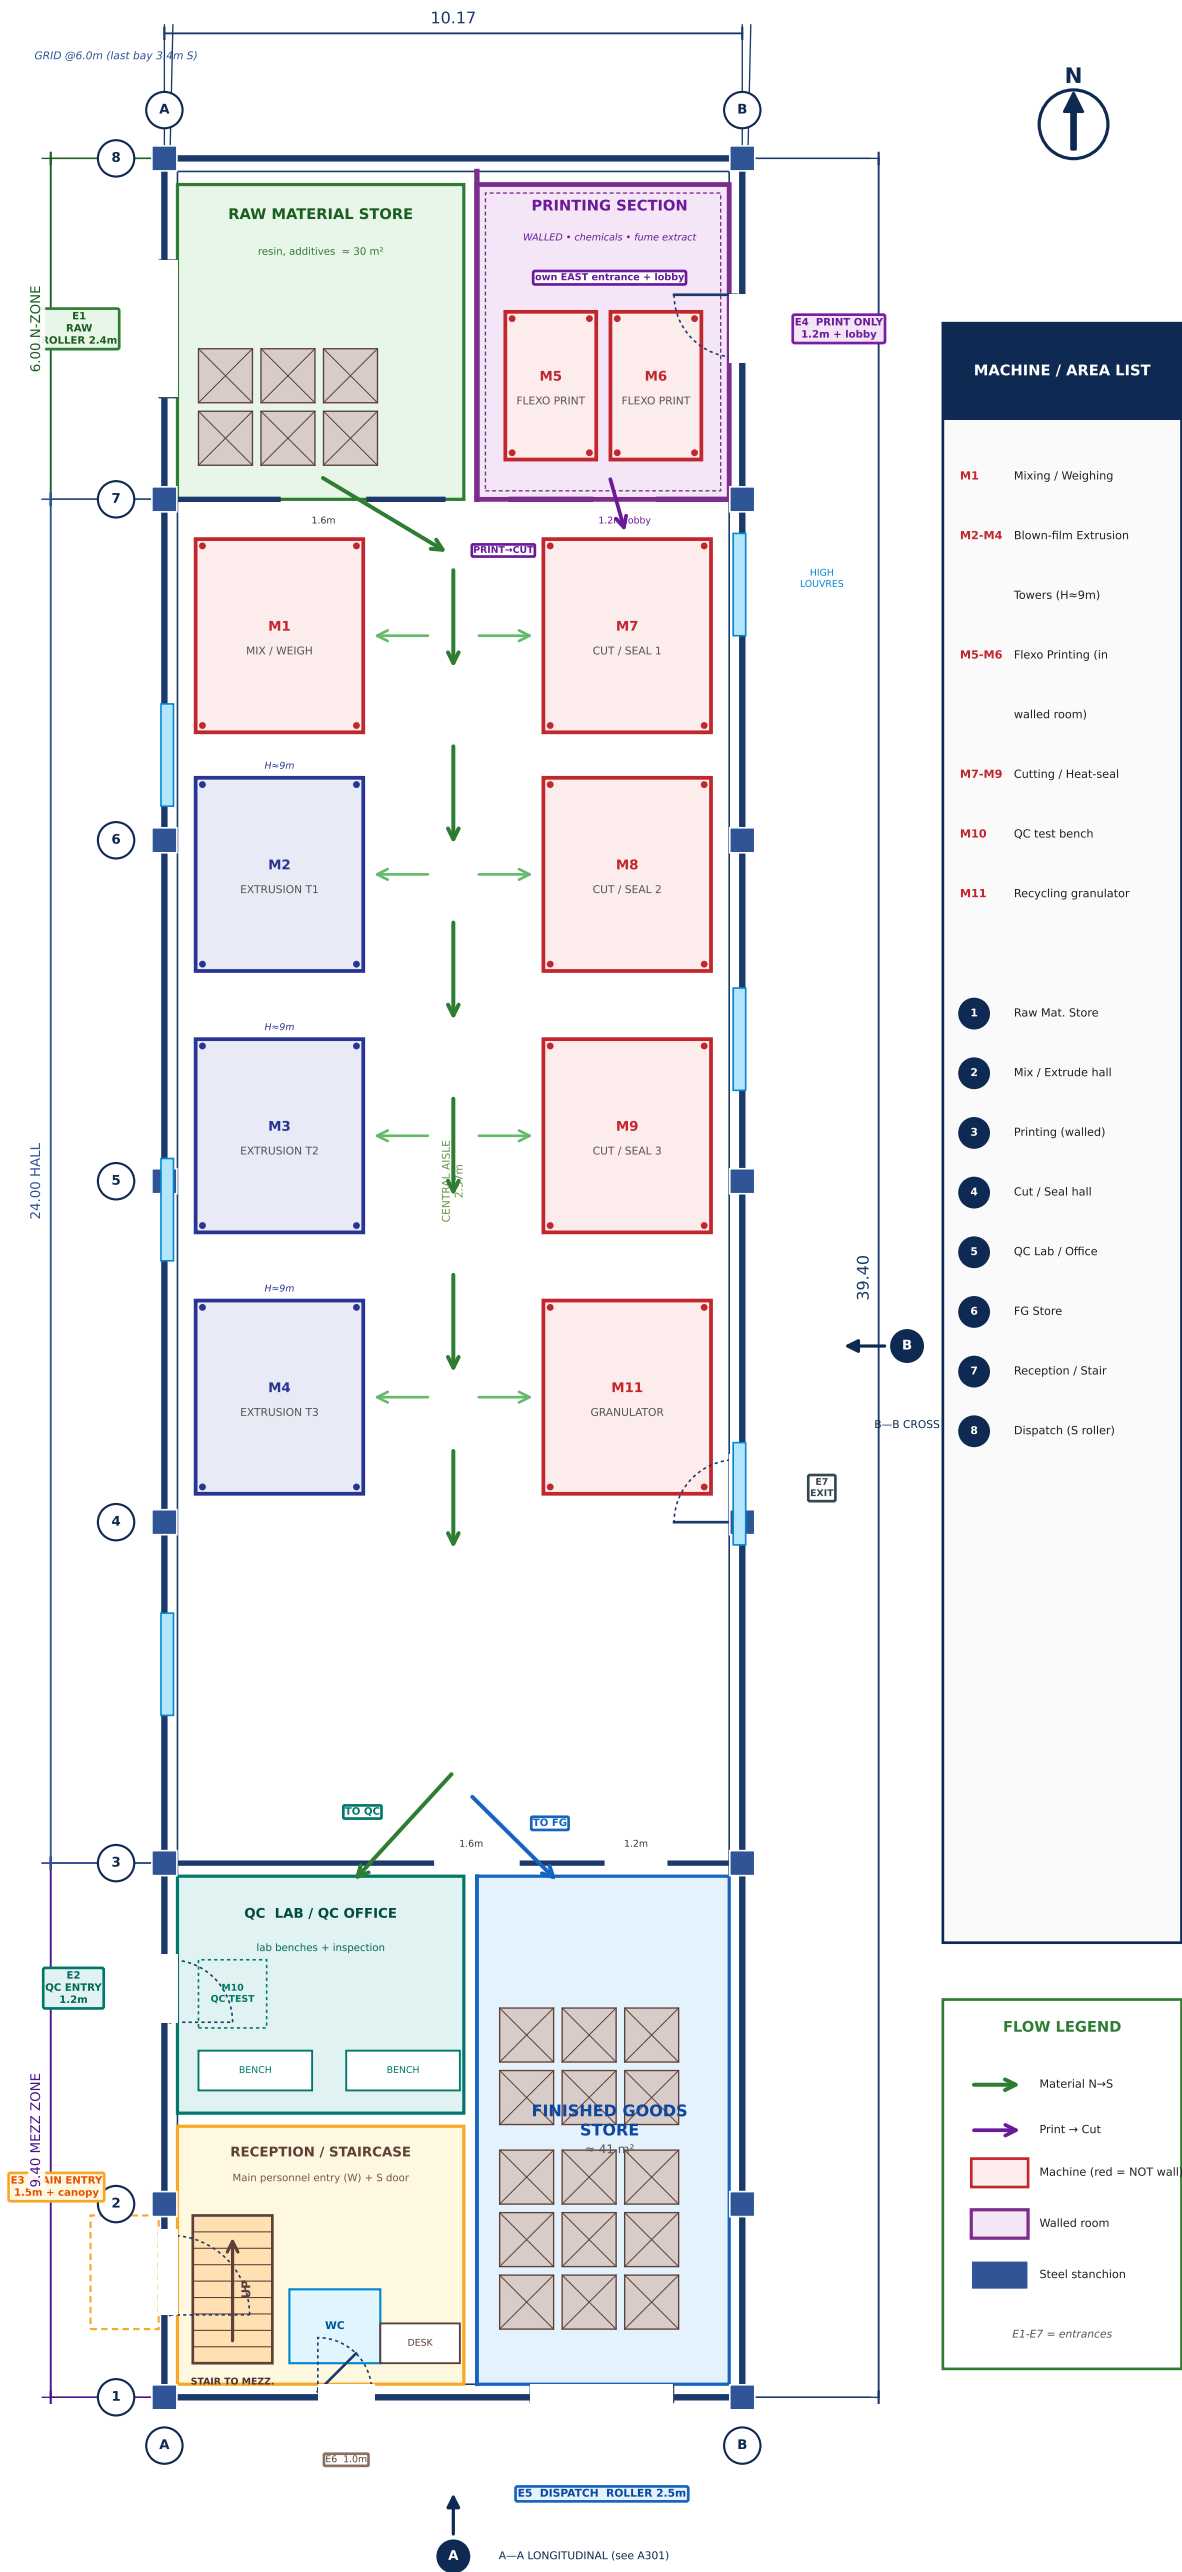

MEZZANINE FLOOR PLAN @+4.00m — OVER SOUTH 9.40m (95.6 m²)


Decked RC slab on steel beams • Offices + Staff + WCs + Utilities • Gallery overlooking hall • External fire-escape stair (E)

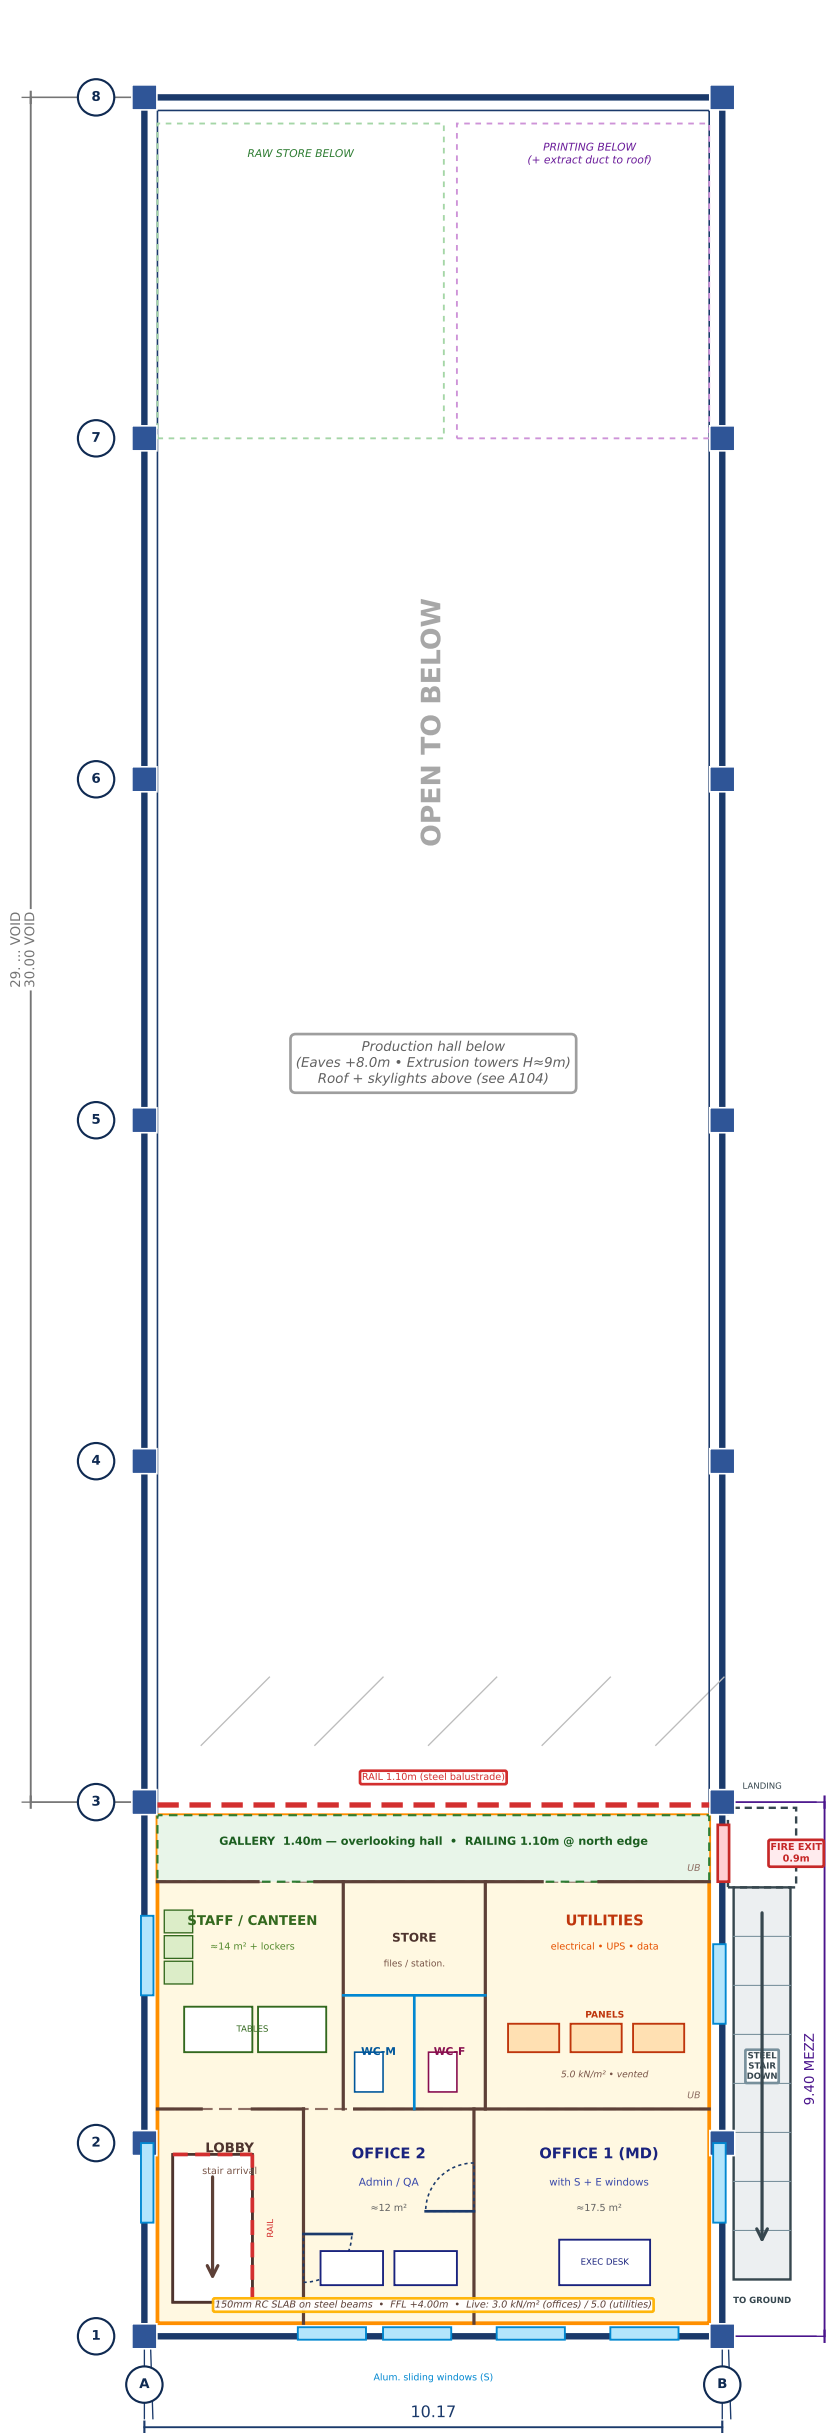

MEZZ AREAS	
Lobby/Stair	≈11 m²
Office 1 MD	≈17.5 m²
Office 2	≈12 m²
Staff	≈14 m²
WCs+Store	≈10 m²
Utilities	≈16.5 m²
Gallery	≈14 m²
TOTAL	≈95.6 m²

MEZZ NOTES	
• Slab 150 RC + screed,	
steel UB/APFC beams.	
• Headroom: 4.0 below,	
4.0 to eaves above.	
• Railing 1.10m steel.	
• Stair 1.20 wide, 2 flights,	
riser ≈175, going 250.	
• Fire exit E + external	
steel stair to ground.	
• Offices: AC + data,	
337lux; Utilities vented.	
• WC soil to septic (E).	
• Verify structure with	
engineer before build.	

ROOF PLAN — GABLE EAVES +8.00m • RIDGE +12.00m (RISE 4.00m)

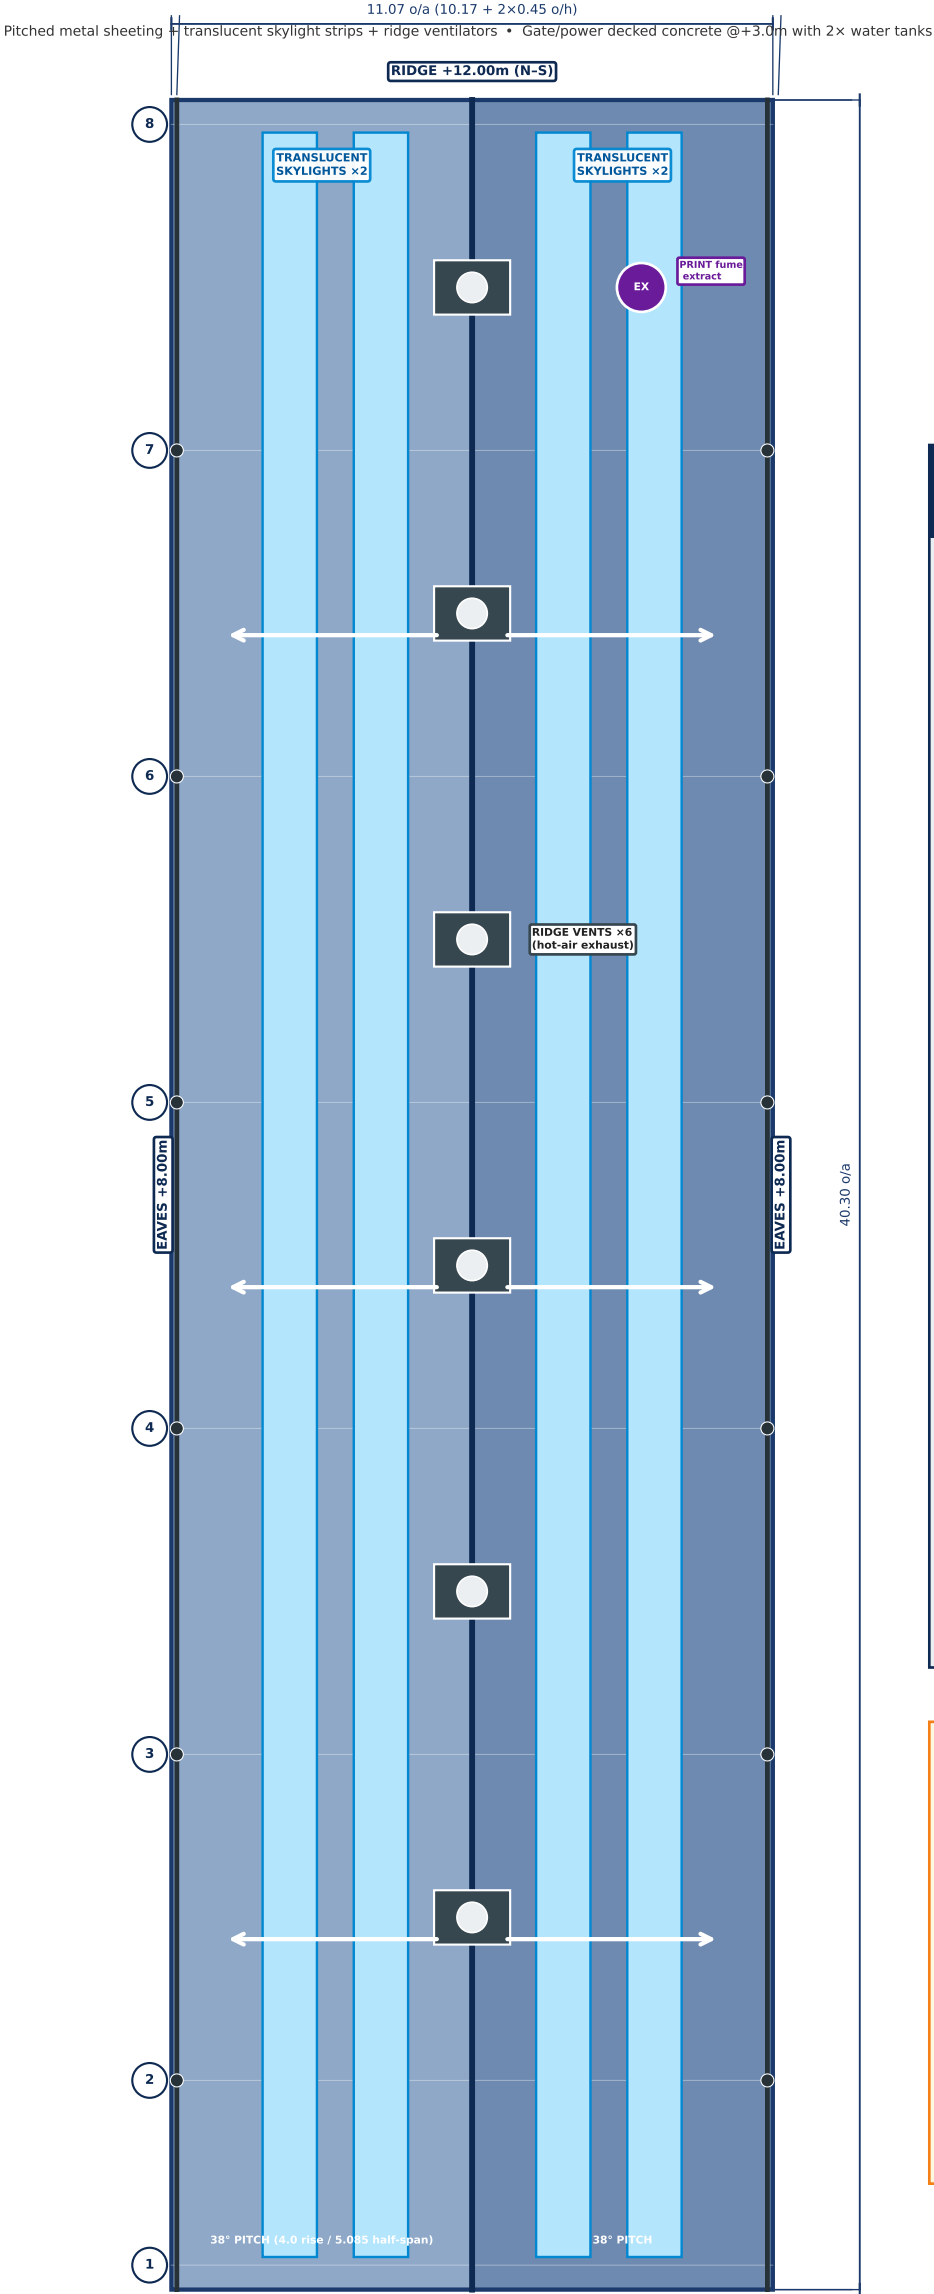

ROOF SPEC

- 0.55 aluminium-zinc metal sheeting, fixed to steel purlins.
- Pitch 38° (4.0/5.085).
- Skylights: translucent GRP/polycarbonate, 1.0 wide x2/slope.
- Ridge vents x6 + eaves gap vent.
- Gutters 150 uPVC + RWP @6m to soakaway.
- Purlins RHS + sag rods.
- Portal rafters UB/RSJ @6.0m (7 frames).
- Eaves HDG fascia.
- Print extract: 300Ø duct + cowl + fan.
- Lightning tape + rods.

DECK + TANKS

- Deck 150 RC + Falls.
- 2x 2000L water + header.
- Borehole → tanks → points (gravity).
- Overflow to drain.
- Parapet 450 + rail.
- Ladder access (E).

NYLON PRODUCTION & PACKAGING PLANT

Along Ilogbo / Foundation Road, Oko-Afo, Badagry LGA, Lagos State


A104 | ROOF PLAN • SKYLIGHTS + VENTS • GATE DECK + TANKS

1:100 | 27-09-2026

PRELIMINARY - FOR DISCUSSION


ELEVATIONS — EAVES +8.00m • RIDGE +12.00m • 38° GABLE

Block 1.2m + metal cladding to eaves • Skylights + ridge vents • West: 3 entrances (E1/E2/E3) • East: print entry (E4) + fire stair

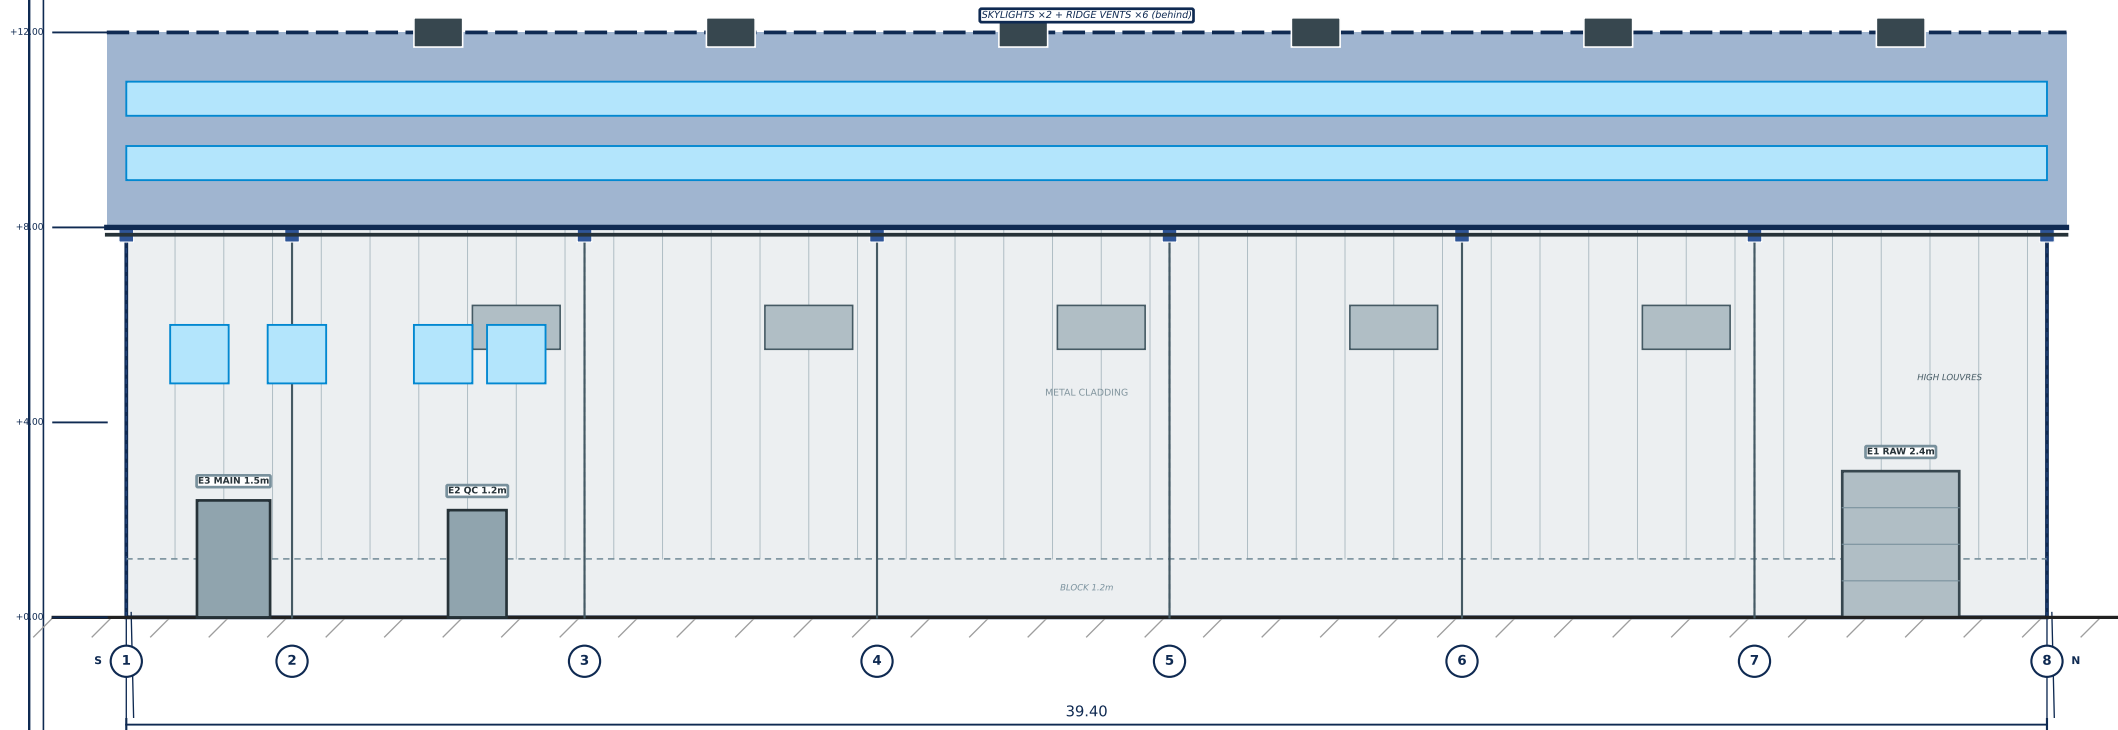


LEFT / WEST ELEVATION (from driveway — 4.0m setback)

S (left) → N (right) • E3 Main + E2 QC + E1 Raw roller • Grid 1-8 @6.0m

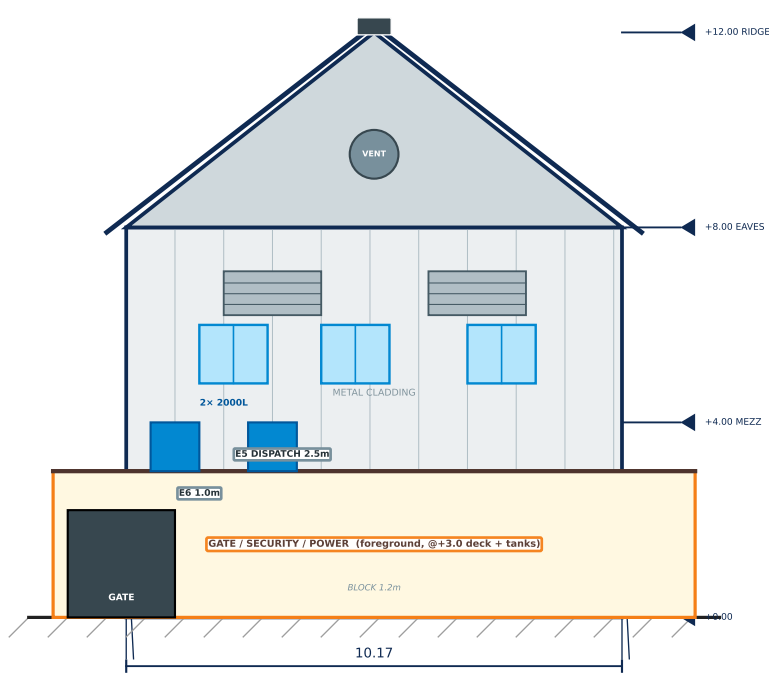


FRONT / SOUTH

from Main Road (gate in foreground)

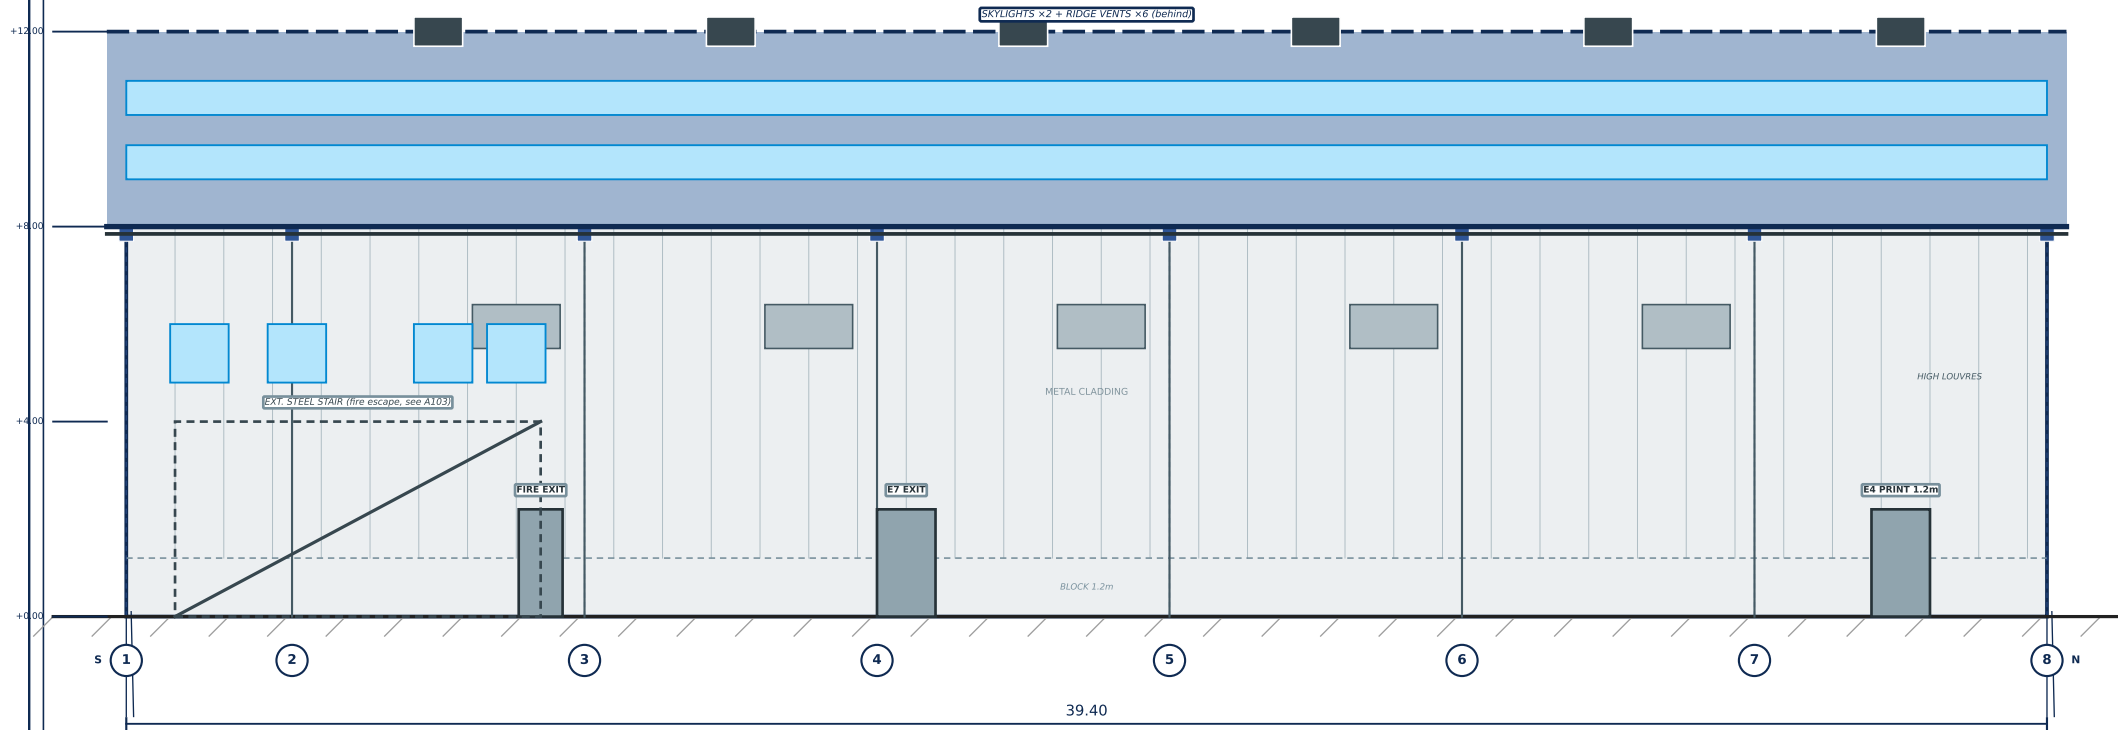

RIGHT / EAST ELEVATION (from 2.0m setback)

S (left) → N (right) • E4 Print-only + E7 Exit + fire-escape stair

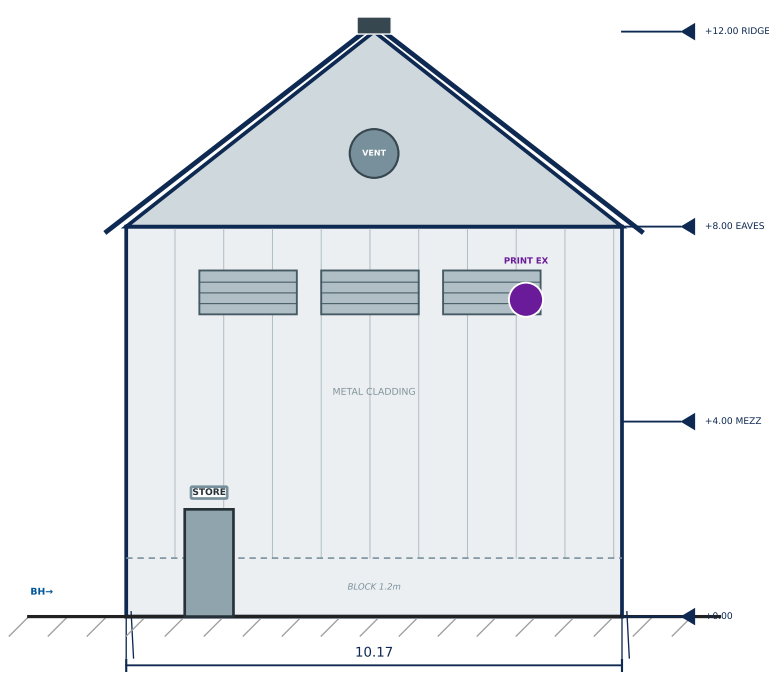

REAR / NORTH

from rear setback (borehole W)

FINISHES & LEVELS

• Walls: 150/215 block to 1.2m + insulated box-profile cladding to +8.0m. • Roof: 0.55 Al-Zn sheets @38° + skylights + vents.

• Doors: steel personnel + roller shutters (see key E1-E7). • Windows: alum. sliding (offices) + louvres (hall, high).

• Levels: +0.00 FFL (power-float) • +3.00 gate deck • +4.00 mezz • +8.00 eaves • +12.00 ridge. • Colours: blues/greys (TBC).

NYLON PRODUCTION & PACKAGING PLANT

Along Ilogbo / Foundation Road, Oko-Afo, Badagry LGA, Lagos State



A201 | ELEVATIONS • FRONT / REAR / SIDES

1:100 | 27-09-2026

PRELIMINARY - FOR DISCUSSION


SECTIONS — A-A LONGITUDINAL (39.40m) • B-B CROSS (10.17m span)

Portal steel @6.0m • Mezz +4.0 south • Extrusion masts ≈9m (check clearance) • Ridge vents + skylights + print extract

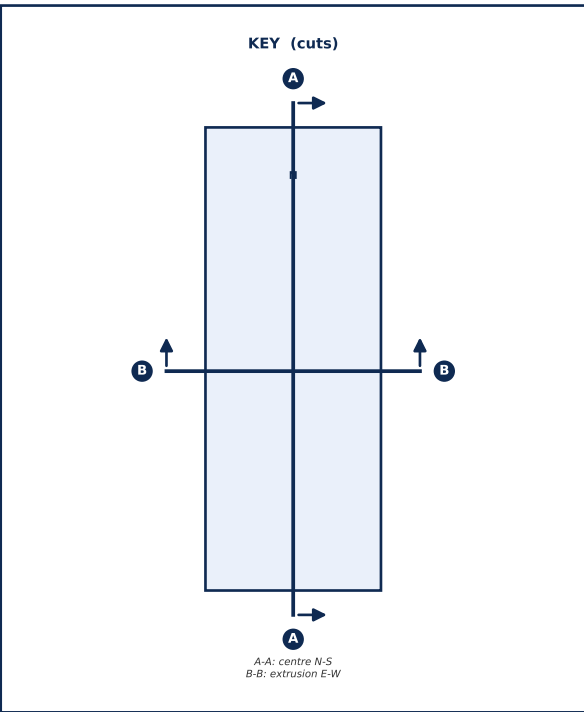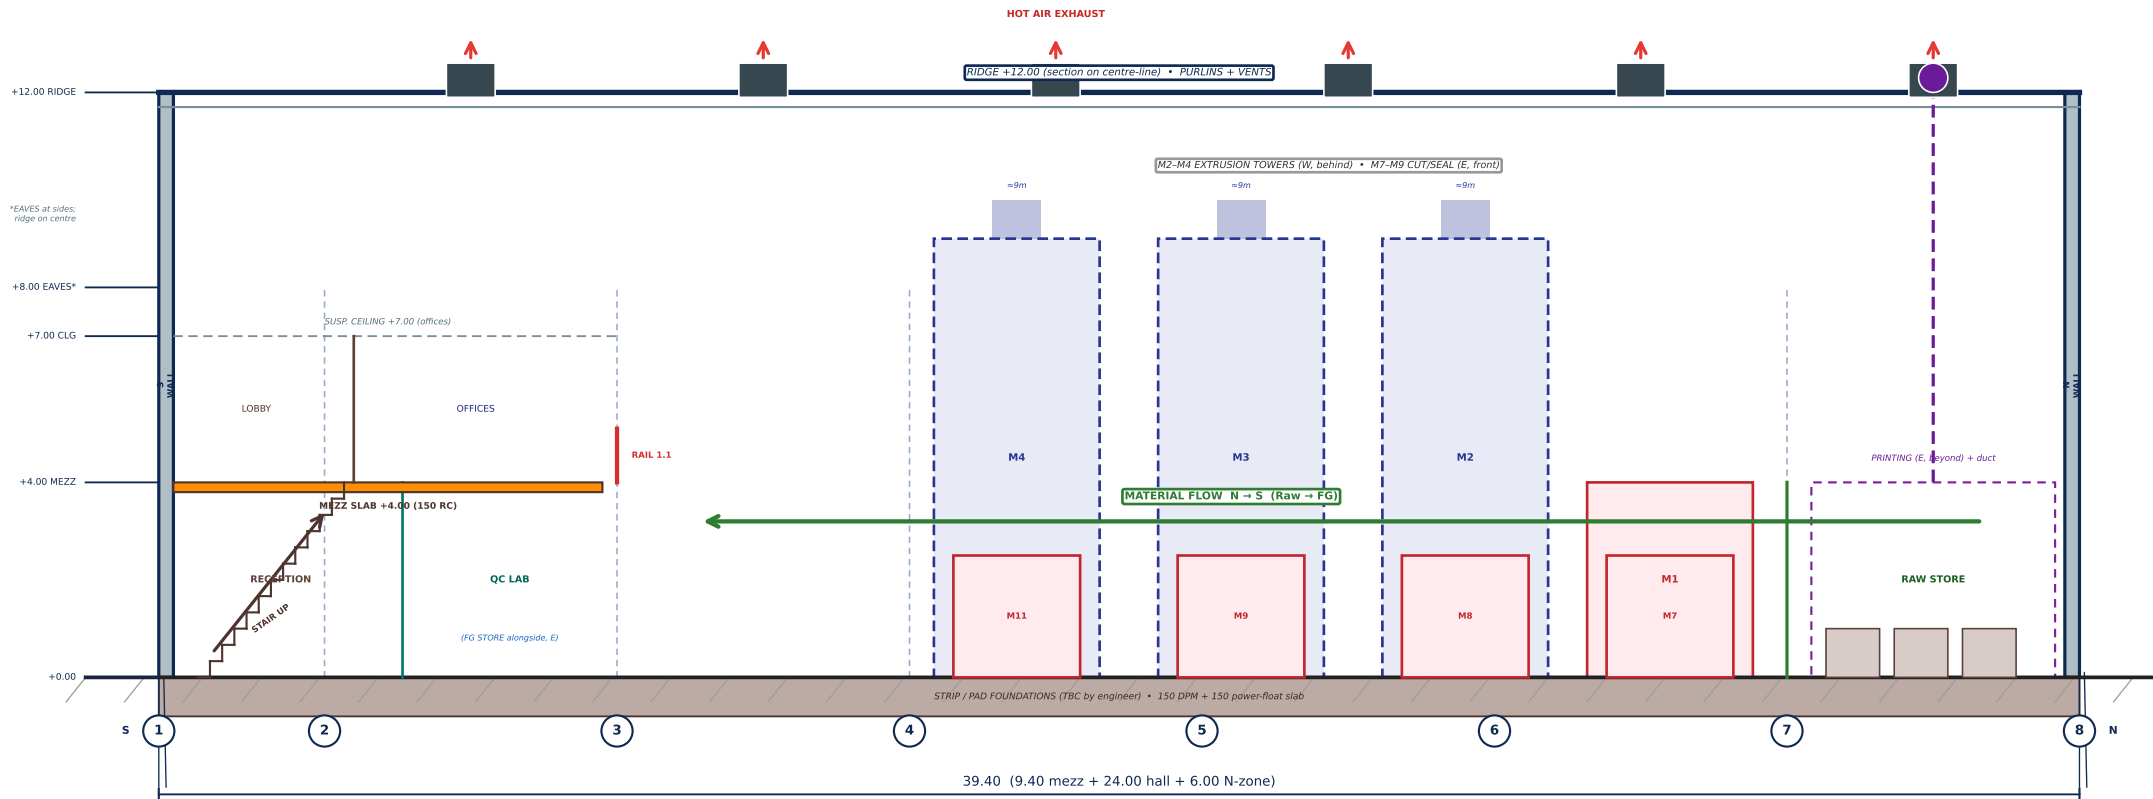

SECTION A—A • LONGITUDINAL (N-S through centre, looking EAST)

S (left) → N (right) • Mezz south + extrusion towers + raw/print north • Ridge +12.0 constant on centre-line

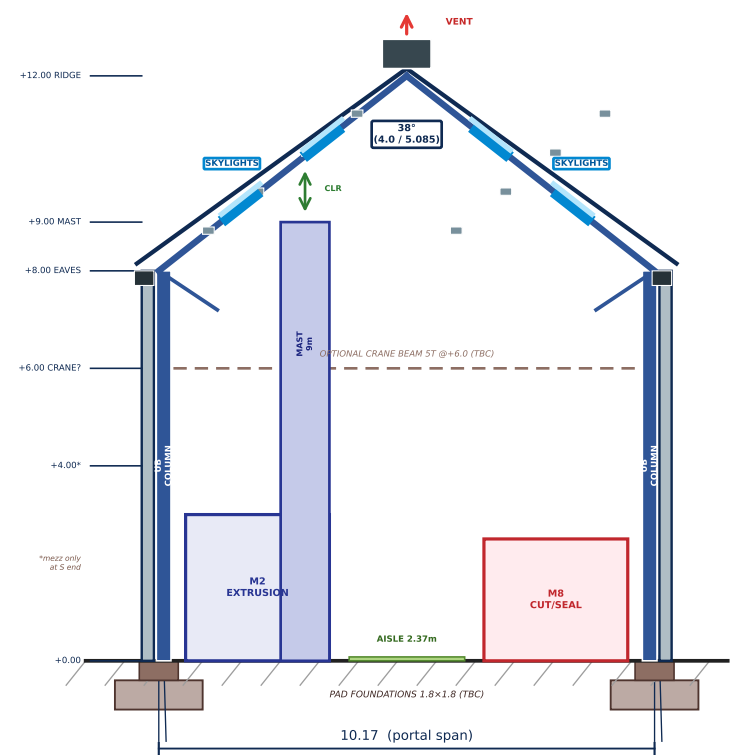


STRUCTURE & BUILD NOTES

- Portal frames: UB columns + rafters @6.0m (7 frames).
- Eaves +8.0, ridge +12.0 (38°). Purlins RHS + sag rods.
- Walls: block 1.2m + cladding; printing room 215 block full ht.
- Floor: 150 slab + DPM + power-float; saw cuts @3m.
- Mezz: 150 RC on UB/APFC + 1.1 rail; pad/strip footings.
- Extrusion masts 9m; keep tall side to ridge (see B-B).
- Crane beam ST optional @+6.0 (confirm with vendor).
- Fire: extinguishers + hose reels + exit signs; print room 2hr.
- Elect: 3-ph to machines + panels on mezz; earthing + LPS.
- Drain: gutters→RWP→soakaway; WCs→septic (E); bund chemicals.
- Verify ALL with structural/M&E engineers + Lagos approvals.

SECTION B—B • CROSS (E-W through extrusion, looking NORTH)

W (left) → E (right) • Portal frame + extrusion mast (W) + cut/seal (E) • Note mast clearance under slope

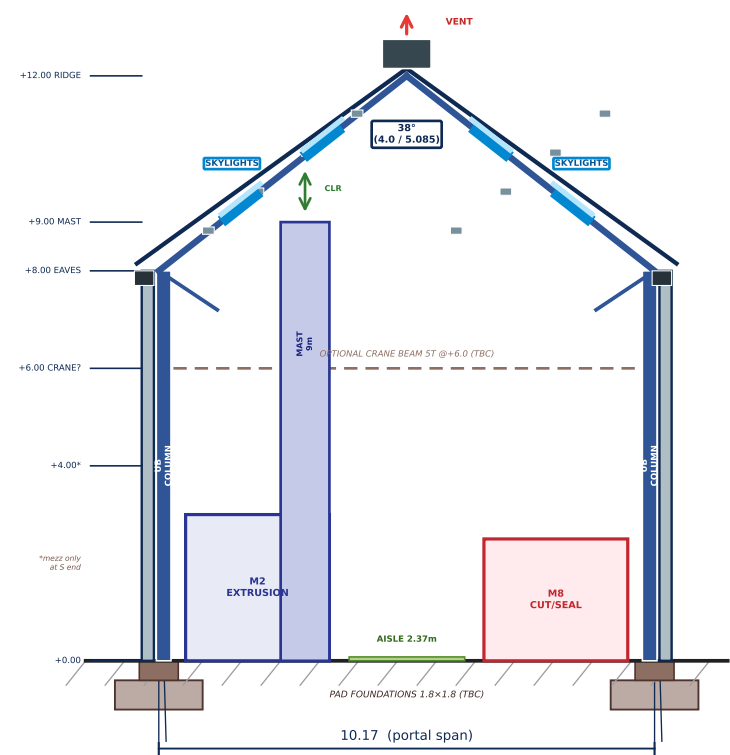

NYLON PRODUCTION & PACKAGING PLANT

Along Ilogbo / Foundation Road, Oko-Afo, Badagry LGA, Lagos State